



HabasisLINK® Straight 1/2" Pitch Belting M1280 Flush Grid 0.5"

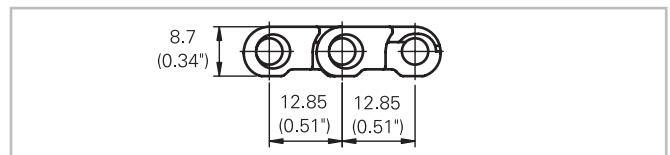

Description

- Imperial width
- 18% open area
- 83% open contact area
- Open hinge
- Rod diameter 4.5 mm (0.18")
- Headless Smart Fit rod retention
- Strong closed edges
- Robust edge design
- Optimized design for smooth sliding transfer
- Compatible to M1200 sprocket series

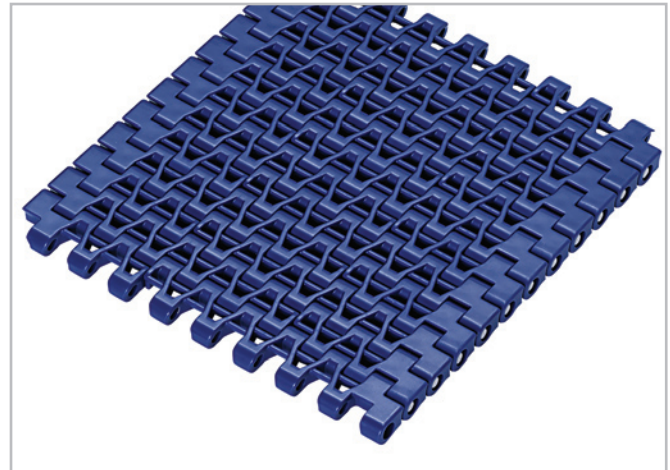

Belt data

Belt material		POM +LF			POM +EC		PBT +FR	
Rod material		PA	PP	PBT	PA	PP	PA	PP
Nominal tensile strength F'_N straight run	N/m	21400	13700	17200	17400	13400	13700	13400
	lb/ft	1466	939	1178	1192	918	939	917
Temperature range	°C	-40 - 93	5 - 93	-40 - 93	-40 - 93	5 - 93	-40 - 130	5 - 105
	°F	-40 - 200	40 - 200	-40 - 200	-40 - 200	40 - 200	-40 - 266	40 - 220
Belt weight m_B	kg/m ²	7.1	7.1	7.1	7.1	7.1	7.4	7.4
	lb/sqft	1.45	1.45	1.45	1.45	1.45	1.52	1.52

Diameter of idling rollers (minimum)		Diameter of support rollers (minimum)		Diameter for gravity take-up and center drive rollers (minimum)		Backbending radius for elevators without sideguards or hold down devices (minimum)	
mm	inch	mm	inch	mm	inch	mm	inch
18	0.7	50	2	75	3	150	6

Standard range of belt widths b_0

mm (nom.)	152.4	203.2	254.0	304.8	355.6	406.4	457.2	508.0	558.8	609.6	660.4	711.2	762.0	etc.
inch (nom.)	6	8	10	12	14	16	18	20	22	24	26	28	30	etc.

Real belt widths are in most cases 0.1% to 0.3% smaller.

Standard belt widths in increments of 2.0" (50.8 mm). Non-standard widths are offered in increments of 0.67" (16.9 mm). Smallest possible width 6.0" (152.4 mm).

For detailed material properties refer to the HabasisLINK® Engineering Guidelines or contact your Habasis representative.

The nominal tensile strength is valid for 23 °C (73 °F). The admissible tensile force depends on the operating temperature near the drive sprockets. Within the temperature range allowed, the admissible tensile force may vary from 100% to 20% of the nominal tensile strength. For detailed information and correct calculation of effective tensile force refer to the Calculation Guide in the HabasisLINK® Engineering Guidelines.

HabasitLINK® Straight 1/2" Pitch Belting M1280 Flush Grid 0.5"



Product liability, application considerations

If the proper selection and application of Habasit products are not recommended by an authorized Habasit sales specialist, the selection and application of Habasit products, including the related area of product safety, are the responsibility of the customer.

All indications / information are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. The data provided herein are based on laboratory work with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experiences can lead to modifications and changes within a short time without prior notice.

BECAUSE CONDITIONS OF USE ARE OUTSIDE OF HABASIT'S AND ITS AFFILIATED COMPANIES CONTROL, WE CANNOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS MENTIONED HEREIN. THIS ALSO APPLIES TO PROCESS RESULTS / OUTPUT / MANUFACTURING GOODS AS WELL AS TO POSSIBLE DEFECTS, DAMAGES, CONSEQUENTIAL DAMAGES, AND FURTHER-REACHING CONSEQUENCES.